
Guinea Button Adjustable Attenuator



Overview

High-Performance RF Signal Attenuator The 2W 5W N Type SMA RF Adjustable Button Attenuator offers precise signal control with step-adjustable attenuation from 0-30dB, 60dB, or 90dB across a wide frequency range of 0-4GHz. The JFW pushbutton attenuator has been a staple tool to RF engineers for over 30 years. Multiple Power and Connector Options Available in 2W and 5W power ratings. The Renhotec RF Attenuator is a high-performance coaxial component designed to precisely reduce the power of an RF signal without distorting its waveform. Engineered for durability and signal integrity, this attenuator is ideal for testing environments, telecommunications, and aerospace. RF Attenuators are available at Mouser from leading manufacturers. RF attenuators are devices used to reduce the power level of radio. We offer a robust portfolio of in-stock, adjustable RF attenuators and phase shifters for multiple applications, including test instrumentation, cellular communication, wireless communications, satellite communication and more.

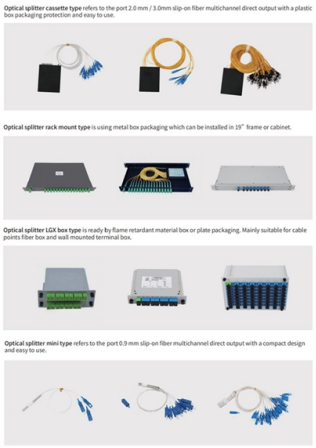

© 2026 ENSAA OPTICAL NETWORKS - All rights reserved

Article Content

5W SMA-KK Step Button Adjustable Attenuator DC

Engineered for durability and signal integrity, this attenuator is ideal for testing environments, telecommunications, and aerospace applications where accurate

Attenuators – Mouser

RF attenuators are devices used to reduce the power level of radio frequency signals without significantly distorting the waveform. They are essential in signal conditioning and calibration.

Push Button Attenuators

We offer a robust portfolio of in-stock, adjustable RF attenuators and phase shifters for multiple applications, including test instrumentation, cellular communication,

RF Attenuators

The Amphenol XMA comprehensive selection of attenuators is engineered to provide accurate and reliable signal reduction in various RF and

Adjustable RF Step Attenuator DC-4GHz 0-60dB / 0-90dB SMA

It allows precise stepwise reduction of signal strength using button controls. Ideal for RF testing, laboratory work, signal optimization, interference control, and protecting sensitive equipment.

RF Variable Attenuators

These RF variable attenuators are dial designs that are continuously variable between minimum and maximum decibel attenuation values. Our continuously variable attenuators have a maximum input

10W 90dB Adjustable Push Button Step Attenuator | Rfshieldingbox

AT3005 is a 90dB Adjustable Push Button Step Attenuator rated from 5 to 10 Watt and operates at DC 2.5 GHz. Our RF attenuators are manufactured to precise industry specifications and the bodies are

RF Attenuators

Over 400 coaxial, surface mount, and MMIC attenuator models for 50-Ohm & 75-Ohm system including fixed attenuators, high-power attenuators, digital step / programmable attenuators, voltage variable

Amazon : Boartechs Button Step Adjustable Attenuators SMA-KK ...

© 2026 ENSAA OPTICAL NETWORKS - All rights reserved

Amazon : Boartechs Button Step Adjustable Attenuators SMA-KK Adjustable Attenuator Signal Adjustable 0-60dB 90dB Button Step Adjustable Attenuators (0-60dB) : Industrial &

Button Step Adjustable Attenuators N-type Button adjustable attenuator ...

The attenuator is designed with a compact size for easy installation and efficient use. The attenuators maintain consistent attenuation characteristics under different environmental conditions.

TOJOIN RF Step Attuenuator Adjustable Key-Press Attenuator Push-Button ...

Each time a key is pressed, the signal attenuator will increase (or decrease) a certain attenuation value, so that the strength of the signal can be adjusted. Push-button step attenuators are commonly used

Pushbutton Attenuators

Manual attenuators are a simple way to add variable attenuation to your test setup. These pushbutton models can be panel mounted or used at a test bench.

0 to 90 dB Push Button Step Attenuator, 50 Ohm N Female To

PE70A1041N stepped attenuator has a minimum attenuation of 0 dB and a maximum attenuation of 90 dB with 1dB step sizes. Our RF step attenuator has frequency range of DC to 3 GHz and a maximum

2W 5W N SMA RF Button Attenuator 0-30dB 4GHz

The platform and merchants assume no related legal liability. High-Performance RF Signal Attenuator The 2W 5W N Type SMA RF Adjustable Button Attenuator

Guinea Programmable Adjustable Attenuator

Wiring diagram for adjustable attenuator Adjustable vertical shaft cable tray Singapore PLC Programmable Distribution Box How to use a fiber optic PBX Programmable Switchboard Fire cable

DUOCAI Button Step Adjustable Attenuators 2W/5W/10W N-type adjustable ...

The attenuator is designed with a compact size for easy installation and efficient use. The attenuators maintain consistent attenuation characteristics under different environmental conditions.

30db 1db Step Push-Button Adjustable Attenuator 2W 5W 3G

30dB 1dB Step Push-Button Adjustable Attenuator 2W 5W 3G N Key Press Type RF Variable Attenuator by ComRF offers precise control and reliable performance.| Alibaba

© 2026 ENSAA OPTICAL NETWORKS - All rights reserved

Adjustable Attenuator SMA/N Type Button Stepper Adjustable

Amazon : Adjustable Attenuator SMA/N Type Button Stepper Adjustable attenuator 2.5G/3G/4G 0-30DB/60dB/90DB 2W/5W (2W DC-3G 0-60DB) : Industrial & Scientific Construction:

Related Video Reference

This video was associated with the source search result. Verify technical details against current product documentation and project requirements.

Contact Us

Continue your research online:

Website: https://ensaa.es
Technical inquiry: https://ensaa.es/contact.html

This document is for preliminary research. Verify specifications against current standards, product documentation and project requirements.

© 2026 ENSAA OPTICAL NETWORKS - All rights reserved